

Vertigo Steatite Essential

NEW



ELECTRIC WATER HEATER

Models 30 to 100
(Multi-position installation)



Comfort

- With its double-tank structure, water heats faster, and your hot shower is ready in less than 50 minutes
- Quick mode selection and temperature regulation thanks to front control knob



Durability

- Double-tank Steatite technology: ceramic dry heating element protected by a sleeve for limited scaling and easy maintenance
- Magnesium anode for increased tank protection
- Diamond-quality glass lining
- Pressure relief valve
- Dielectric union
- Specific lip gasket to avoid corrosion around the flange



Installation

- Easy installation with wall-mounting plates and drilling template
- Multi-position installation – can be installed in vertical or horizontal position
- Space-saving with only 29cm depth

Safe operation:

- IP 24 - full compliance with European standards for electrical safety and user protection



Energy savings

- Eco+ self-learning mode ensures the right amount of hot water is provided when needed
- Absence mode saves energy while you are away from home
- Accurate electronic thermostat and finest temperature control
- CFC-free high-density insulation for higher energy savings



User-friendly

- Intuitive interface with shower ready light indicator



- 1 Temperature regulation and mode selection knob
- 2 ECO+: automatic operation based on the consumer's daily habits
- 3 Absence mode anti-frost mode (7°C)


- 1 DIAMOND-QUALITY GLASS LINING** for long life and reliability
- 2 Optimised stainless steel outlet pipe**
- 3 DOUBLE MAGNESIUM ANODE** for protection against corrosion
- 4 Inlet diffuser**
- 5 High-density, 0% CFC polyurethane C**
- 6 ELECTRONIC THERMOSTAT** for temperature control accuracy



Steatite x2 TECHNOLOGY



Dry Steatite heating element



Adapted to aggressive, highly mineralised and desalinated water. Its protective enamel-coated steel sleeve facilitates maintenance, and there is never any need to drain the tank to replace it.


Technical specifications

Model	Power output: exit tank (W)	Power output: entry tank (W)	Voltage (V)	Total heat-up time $\Delta T=50^{\circ}\text{C}$ ($15^{\circ}\text{C} \rightarrow 65^{\circ}\text{C}$)	Heat-up time: exit tank	Flange opening	ErP energy class	Profile
30 ⁽¹⁾	1000	1000	230	1h27	0h44	72	A B	S
50 ⁽²⁾	1500	1000	230	2h02	0h47	72	A B	M
80 ⁽³⁾	1500	1000	230	3h18	1h16	72	A B	M
100 ⁽⁴⁾	1500	1000	230	4h04	1h33	72	A B	M


Installation dimensions (mm)

Model	Dimensions (mm)						Net weight (kg)
	Height (H)	Width (W)	Depth ⁽⁵⁾ (D)	A	B	C	
30 ⁽¹⁾	601	490	290	440	280	160	19.5
50 ⁽²⁾	767	490	290	610	500	155	24.5
80 ⁽³⁾	1092	490	290	975	700	115	32.5
100 ⁽⁴⁾	1302	490	290	1185	800	115	37.5

(1) ErP capacity is 25 L (2) ErP capacity is 40 L (3) ErP capacity is 65 L (4) ErP capacity is 80 L (5) Without wall plates

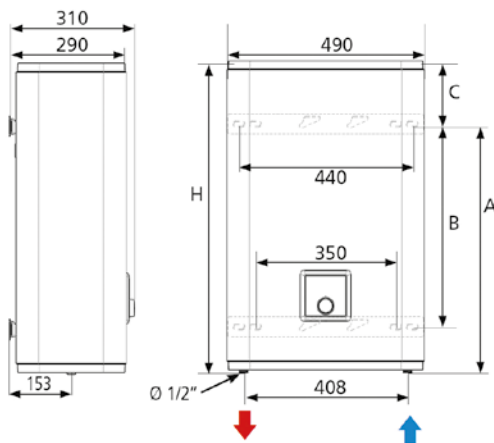

VERTICAL INSTALLATION

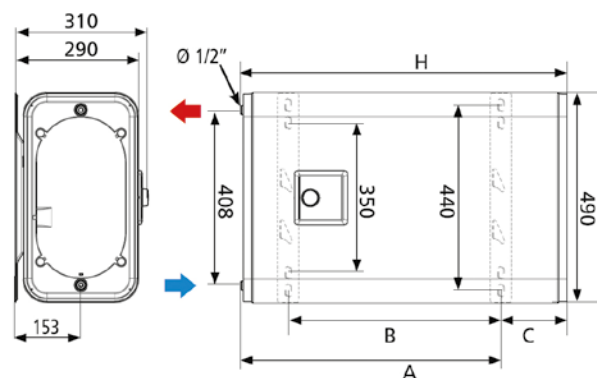

HORIZONTAL INSTALLATION