

## Vertigo Steatite Wi-Fi

SMART, STYLISH AND SPACE-SAVING WATER HEATER THAT BRINGS YOU OPTIMUM THERMAL COMFORT

Models 30 to 100 (Multi-position installation)



### BENEFITS

- Space-saving solution due to flat design (less than 30 cm depth)
- Fast heating thanks to double-tank structure
- Steatite heating element protected by a sleeve for limited scaling and easy maintenance
- Connectivity & remote control via the Cozytouch application
- Energy savings: Eco+ mode, Absence mode, Energy consumption follow-up



Available colors: White & Silver

### + EASY PROGRAMMING WITH DIGITAL CONTROL PANEL



**Waterdrop LED Indicator:** Level of hot water ready to use

**Boost:** Increase hot water production to meet unforeseen needs

**Absence mode:** Anti-frost position (7 °C)

**Manual mode:** Selection of required hot water quantity

**Eco+ mode:** Automatic operation according to consumer's daily habits



### WI-FI CONNECTIVITY & REMOTE CONTROL

**With Cozytouch App you can:**

- Manage your water heater from everywhere
- Monitor your energy consumption
- Tailor your home comfort to your needs
- Switch off water heater when you are out



Download the APP for free



## Vertigo Steatite Wi-Fi

Models 30 to 100 (Multi-position installation)

### + PROVEN QUALITY WITH STEATITE TECHNOLOGY



**1 DIAMOND QUALITY GLASS LINING**  
for long life and reliability

**2** High-density, 0% CFC polyurethane foam

**3 MAGNESIUM ANODE X2**  
for protection against corrosion

**4** Inlet diffuser


**5** Optimised stainless steel outlet pipes

**6 ELECTRONIC REGULATION**  
for temperature control accuracy

**Steatite**  
x2 TECHNOLOGY

#### DRY STEATITE HEATING ELEMENT

Adapted to aggressive, highly mineralised and desalinated water. Its protective enamel-coated steel sleeve makes maintenance easy, and there is no need ever to drain the tank to replace it.




### + EASY INSTALLATION

• Wall mounted plates and drilling template available on the packaging

#### Installation dimensions

Model	Dimensions (mm)				Net weight (kg)
	H	A	B	C	
30 <sup>(1)</sup>	593	452	280	141	19.5
50 <sup>(2)</sup>	766	609	500	157	24.5
80 <sup>(3)</sup>	1090	973	700	117	32.5
100 <sup>(4)</sup>	1301	1184	800	117	37.5

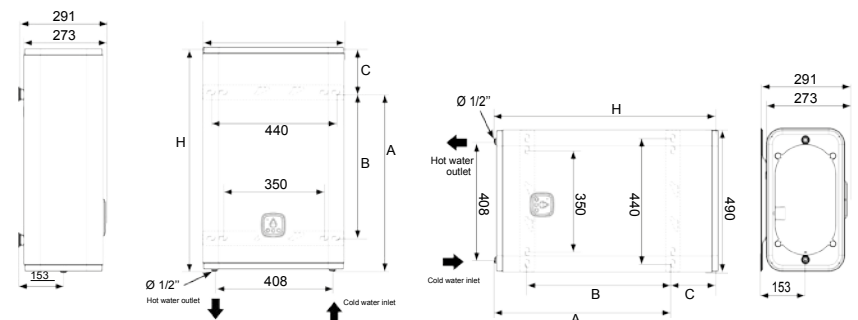

#### Technical data

Model	Number of users	Maximum power output: exit tank (W)	Power output: entry tank (W)	Voltage (V)	Total heat-up time $\Delta T=50^{\circ}\text{C}$	Heat-up time: exit tank	Energy consumption (kWh/24 h at $65^{\circ}\text{C}$ )	ErP energy class	Profile
30 <sup>(1)</sup>		1000	1000	220-240	1h27	0h44	0.28	<b>B</b>	S
50 <sup>(2)</sup>		2250	1000	220-240	1h46	0h33	0.69	<b>B</b>	M
80 <sup>(3)</sup>		2250	1000	220-240	2h52	0h53	1.01	<b>B</b>	M
100 <sup>(4)</sup>		2250	1000	220-240	3h32	1h05	1.11	<b>B</b>	M

(1) ErP capacity is 25 L (2) ErP capacity is 40 L (3) ErP capacity is 65 L (4) ErP capacity is 80 L