

O'Pro Small & Slim



ELECTRIC WATER HEATER

Models 10 to 15
(Vertical wall-mounted above and under sink)

Models 30 to 50
(Slim vertical wall-mounted)



Comfort

- Dedicated solution for direct hot water availability

Durability

- Extended tank life thanks to O'Pro exclusive anti-corrosive protection
- Magnesium anode to bolster tank protection
- Diamond-quality glass lining
- Pressure relief valve
- Dielectric union
- Specific lip gasket to avoid corrosion around the flange

Installation

Installation options:

- 10 and 15L: above & under sink mounting models
- 30 and 50L: slim diameter (338mm) water heater with above sink configuration

Safe operation:

- IP 25 (above sink models) and IP 24 (under sink models) – full compliance with European standards for electric safety and user protection

Energy savings

- High-efficiency water inlet
- CFC-free high-density insulation for increased energy savings

User-friendly

- Control knob on the bottom (above sink models) or on the top (under sink models)
- Heating light indicator

O'Pro TECHNOLOGY

Exclusive anti-corrosive system

O'Pro technology uses an ohmic resistor to balance out the electric potential of both the tank and the heating element. This extends the life of the magnesium anode as well as bolstering protection against corrosion.

Video:


Technical specifications

Model	Output (W)	Voltage (V)	Heat-up time at 60°C (Δt=20°C) (min)	Heat-up time at 60°C (Δt=50°C) (min)	Energy consumption kWh/24 h at 65°C	ErP energy class	Profile
Above sink							
10	1600	230 / 220-240*	10	24	0.48	A	XXS
15	1600	230 / 220-240*	14	35	0.58	B	XXS
Under sink							
10	2000	230 / 220-240*	8	19	0.63	B	XXS
15	2000	230 / 220-240*	11	28	0.66	B	XXS
Vertical wall-mounted							
30	2000	230 / 220-240*	23	57	0.76	C	S
50	2000	230 / 220-240*	38	96	1.13	C	M

CE ENE IP 25 IP 24

Installation dimensions (mm)

Model	Dimensions (mm)						Flange opening (Ø) mm	Net weight (kg)
	Ø	A	B	C	D	E		
Above sink								
10	255	455	175	280	67	264	78	6.5
15	338	400	172	228	84	348	78	7.5
Under sink								
10	255	455	235	220	67	264	78	6.5
15	338	400	232	168	84	348	78	7.5
Vertical wall-mounted								
30	338	617	150	467	84	348	78	11.5
50	338	905	162	743	84	348	78	14.5

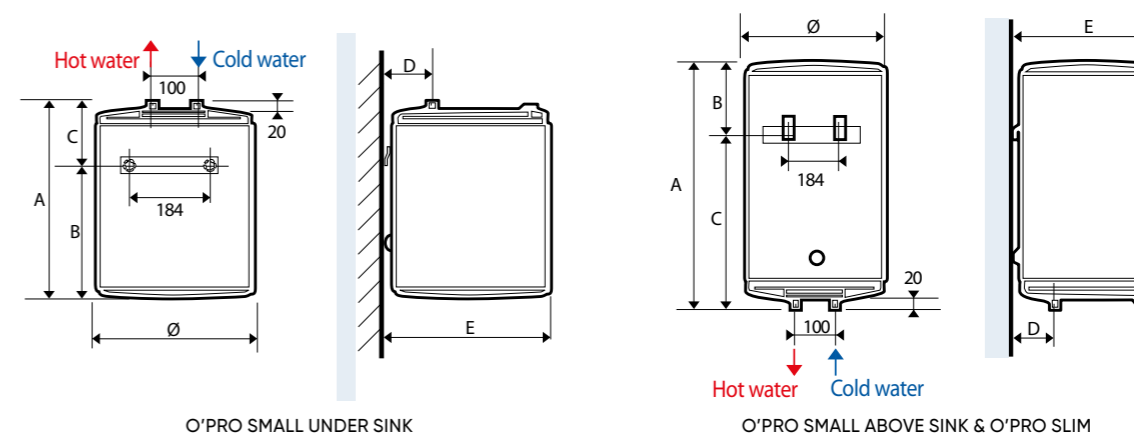

* Depending on models



ELECTRIC WATER HEATER

Models 30 to 100
(Multi-position installation)



Video:



Comfort

- With its double-tank structure, water heats faster, and your hot shower is ready in less than 50 minutes
- Quick mode selection and temperature regulation thanks to front control knob

Durability

- Dual copper heating element
- Extended tank life thanks to O'Pro exclusive anti-corrosive system
- Magnesium anode to bolster tank protection
- Diamond-quality glass lining
- Pressure relief valve
- Dielectric union
- Specific lip gasket to avoid corrosion around the flange

Installation

- Easy installation with wall-mounting plates and drilling template on carton box
- Multi-position installation – vertical or horizontal position
- Space-saving with only 29 cm depth

Safe operation:

- IP 24 – full compliance with European standards for electrical safety and user protection

Energy savings

- Eco+ self-learning mode ensures the right amount of hot water is supplied when needed.
- Absence mode saves energy away from home
- Accurate electronic thermostat and fully accurate temperature controls
- CFC-free high-density insulation to increase energy savings


User-friendly

- Intuitive interface with water drop light indicator



- 1 Temperature regulation and mode selection knob
- 2 ECO+ mode: automatic operation based on consumers' daily habits
- 3 Absence anti-frost mode (7°C)

- 1 DIAMOND-QUALITY GLASS LINING for extended life and increased reliability
- 2 Optimised stainless steel outlet pipe
- 3 Sheathed immersion heating element (x2)
- 4 Inlet diffuser
- 5 High-density, 0% CFC polyurethane foam
- 6 MAGNESIUM ANODE (X2) for protection against corrosion
- 7 ELECTRONIC THERMOSTAT for temperature control accuracy

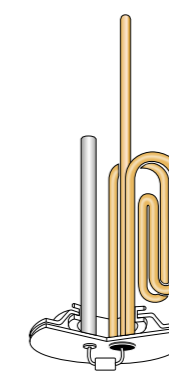

O'Pro
TECHNOLOGY

Exclusive anti-corrosive system

O'Pro technology uses an ohmic resistor to balance out the electric potential of both the tank and the heating element. This prolongs the life of the magnesium anode as well as bolstering protection against corrosion.

Video:



Technical specifications


Model	Power output: exit tank (W)	Power output: entry tank (W)	Voltage (V)	Total heat-up time $\Delta T=50^{\circ}\text{C}$ (15°C -> 65°C)	Heat-up time: exit tank	Flange opening	ErP energy class	Profile
30 ⁽¹⁾	1000	1000	230	1h27	0h44	72	A B	S
50 ⁽²⁾	1500	1000	230	2h02	0h47	72	A B	M
80 ⁽³⁾	1500	1000	230	3h18	1h16	72	A B	M
100 ⁽⁴⁾	1500	1000	230	4h04	1h33	72	A B	M

Installation dimensions (mm)


Model	Dimensions (mm)						Net weight (kg)
	Height (H)	Width (W)	Depth (D) ⁽⁵⁾	A	B	C	
30 ⁽¹⁾	601	490	290	440	280	160	19
50 ⁽²⁾	767	490	290	610	500	155	21
80 ⁽³⁾	1090	490	290	975	700	115	29
100 ⁽⁴⁾	1300	490	290	1185	800	115	34

(1) ErP capacity is 25 L (2) ErP capacity is 40 L (3) ErP capacity is 65 L (4) ErP capacity is 80 L (5) Without wall plates

CE ENEC IP 24

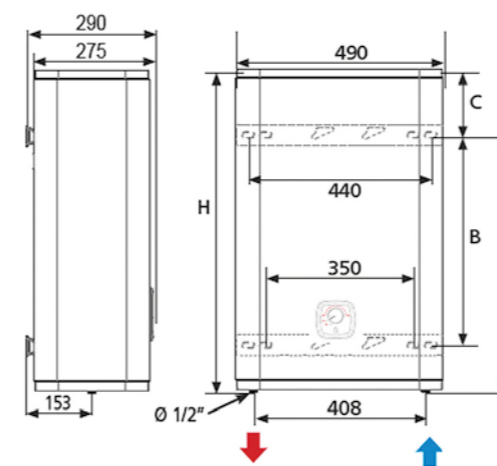

VERTICAL INSTALLATION

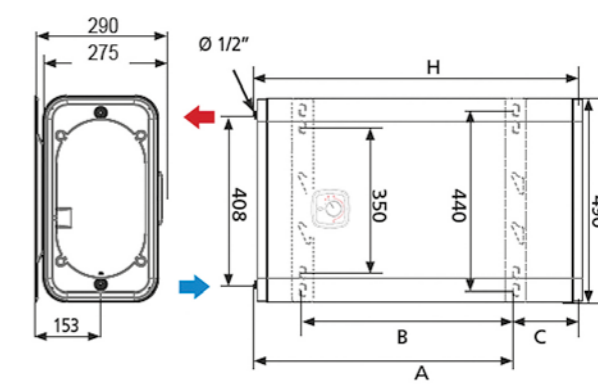

HORIZONTAL INSTALLATION

Vertigo Steatite Essential NEW



ELECTRIC WATER HEATER

Models 30 to 100
(Multi-position installation)



Video:



Comfort

- With its double-tank structure, water heats faster, and your hot shower is ready in less than 50 minutes
- Quick mode selection and temperature regulation thanks to front control knob

Durability

- Double-tank Steatite technology: ceramic dry heating element protected by a sleeve for limited scaling and easy maintenance
- Magnesium anode to bolster tank protection
- Diamond-quality glass lining
- Pressure relief valve
- Dielectric union
- Specific lip gasket to avoid corrosion around the flange

Installation

- Easy installation with wall-mounting plates and drilling template
- Multi-position installation – vertical or horizontal position
- Space-saving with only 29cm depth

Safe operation:

- IP 24 – full compliance with European standards for electrical safety and user protection

Energy savings

- Eco+ self-learning mode ensures the right amount of hot water is supplied when needed
- Absence mode saves energy away from home
- Accurate electronic thermostat and fully accurate temperature controls
- CFC-free high-density insulation to increase energy savings

User-friendly

- Intuitive interface with shower ready light indicator



- 1 Temperature regulation and mode selection knob
- 2 ECO+ mode: automatic operation based on consumers' daily habits
- 3 Absence anti-frost mode (7°C)

- 1 **DIAMOND-QUALITY GLASS LINING** for extended life and increased reliability
- 2 Optimised stainless steel outlet pipe
- 3 **DOUBLE MAGNESIUM ANODE** for protection against corrosion
- 4 Inlet diffuser
- 5 High-density, 0% CFC polyurethane C
- 6 **ELECTRONIC THERMOSTAT** for temperature control accuracy

Video:

Steatite x2 TECHNOLOGY

Dry Steatite heating element

Adapted to aggressive, mineralised and desalinated water. Its protective enamel-coated steel sleeve facilitates maintenance, and there is never any need to drain the tank to replace it.

Technical specifications


Model	Power output: exit tank (W)	Power output: entry tank (W)	Voltage (V)	Total heat-up time $\Delta T=50^{\circ}\text{C}$ ($15^{\circ}\text{C} \rightarrow 65^{\circ}\text{C}$)	Heat-up time: exit tank	Flange opening	ErP energy class	Profile
30 ⁽¹⁾	1000	1000	230	1h27	0h44	72	A B	S
50 ⁽²⁾	1500	1000	230	2h02	0h47	72	A B	M
80 ⁽³⁾	1500	1000	230	3h18	1h16	72	A B	M
100 ⁽⁴⁾	1500	1000	230	4h04	1h33	72	A B	M

Installation dimensions (mm)

Model	Dimensions (mm)						Net weight (kg)
	Height (H)	Width (W)	Depth ⁽⁵⁾ (D)	A	B	C	
30 ⁽¹⁾	601	490	290	440	280	160	19.5
50 ⁽²⁾	767	490	290	610	500	155	24.5
80 ⁽³⁾	1092	490	290	975	700	115	32.5
100 ⁽⁴⁾	1302	490	290	1185	800	115	37.5

(1) ErP capacity is 25 L (2) ErP capacity is 40 L (3) ErP capacity is 65 L (4) ErP capacity is 80 L (5) Without wall plates

CE ENEC IP 24

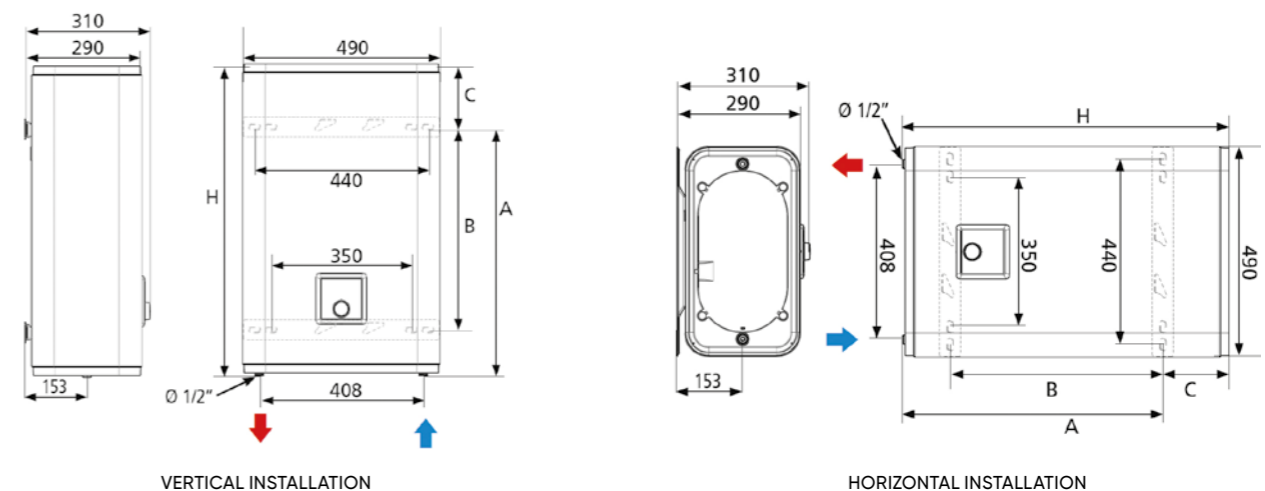



Smart programming, energy savings and greater comfort, all in one connected water heater



Waterdrop digital interface

Smart and stylish, Vertigo Steatite Wi-Fi and Steatite Cube Wi-Fi are space-saving water heaters that you can control no matter where you, delivering game-changing benefits. They fit into any room in your home, catering to your every single hot water need.

Bringing you optimum thermal comfort on a daily basis while regulating your energy consumption!



Cozytouch

Atlantic Cozytouch

CONNECT AND CONTROL YOUR WATER HEATER

Atlantic's smart water heaters can be controlled remotely with the Cozytouch application, customising your temperature and hot water amount not to mention saving precious energy.


The Atlantic Cozytouch application is user-friendly and simple. It enables you to:



Energy savings



Schedule absences and avoid unnecessary heating. The Absence mode ensures energy savings while you are away and a hot water supply when you return.

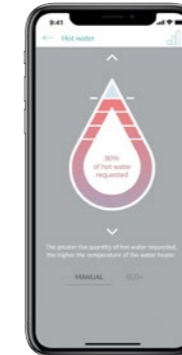


Remotely control hot water production. Check and regulate your preferred amount of hot water.




Adjust hot water production according to your current household needs. The water heater learns from your everyday lifestyle, adjusts heating times to reflect your needs and saves energy.



Comfort

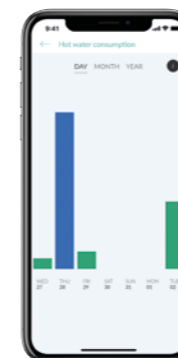

Regulate your water heater consumption. Monitor how much hot water and electricity the water heater uses.

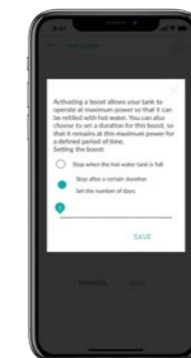

Manage unexpected needs and never run out of hot water. The Boost function makes the water heater operate at maximum capacity to account for unexpected demands.

EASY SETUP



1 DOWNLOAD the free Cozytouch application.



Download the App for free:
 
 Cozytouch



2 CREATE AN ACCOUNT and add your Atlantic products.



3 CONNECT AND CONTROL your products remotely.

Steatite Cube Wi-Fi



 **Wi-Fi CONNECTIVITY (IP)**

ELECTRIC WATER HEATER

Models 75 to 150
(Vertical wall-mounted)



White

Silver



Energy savings

- Eco+ self-learning mode to supply the right amount of hot water when needed
- Absence mode: generates energy savings when away from home
- Monitor water and electricity use with the Cozytouch application
- High-efficiency water inlet
- CFC-free high-density insulation to increase energy savings



User-friendly

- Ergonomic digital interface with heating indicator, operating modes and smart functions



- 1 Wi-Fi connectivity**
- 2 Waterdrop LED indicator:** amount of hot water ready to use
- 3 Absence mode:** anti-frost position (7 °C)
- 4 Manual mode:** required hot water amount selection
- 5 Eco+ mode:** automatic operation based on consumers' daily habits
- 6 QR code** for easy pairing with Cozytouch



Comfort

- Easy programming with quick mode selection
- Boost mode generates maximum heating for extra water needs
- Connectivity and remote control via the Cozytouch application



Durability

- Steatite technology: ceramic dry heating element protected by a sleeve for limited scaling and easy maintenance
- Magnesium anode to bolster tank protection
- Diamond-quality glass lining
- Pressure relief valve
- Dielectric union
- Specific lip gasket to avoid corrosion around the flange



Installation

- Easy installation with wall-mounting plates and drilling template

Safe operation:

- IP 24 - full compliance with European standards for electrical safety and user protection

- 1 DIAMOND-QUALITY GLASS LINING** for extended life and increased reliability
- High-density, 0% CFC polyurethane foam
- 3 MAGNESIUM ANODE** for protection against corrosion
- Inlet diffuser
- Optimised stainless steel outlet pipe
- 6 ELECTRONIC REGULATION** for temperature control accuracy




Steatite
TECHNOLOGY

Video:



Dry Steatite heating element



Adapted to aggressive, mineralised and desalinated water. Its protective enamel-coated steel sleeve facilitates maintenance, and there is never any need to drain the tank to replace it.


Technical specifications

Model	Output (W)	Voltage (V)	Heat-up time at 60°C (Δt=20°C)	Heat-up time at 60°C (Δt=50°C)	Energy consumption (kWh/24 h at 65°C)	ErP energy class	Profile
75	2400	220-240	0h46	1h55	0.89	A B	M
100	2400	220-240	0h59	2h28	1.1	A B	M
150	2400	220-240	1h28	3h40	1.48	A B	M


Installation dimensions (mm)

Model	Dimensions (mm)			Flange opening (Ø) mm	Net weight (kg)
	H	A	C		
75	712	609	82	78	27
100	883	761	101	78	32
150	1203	1103	79	78	42

CE ENEC IP 24

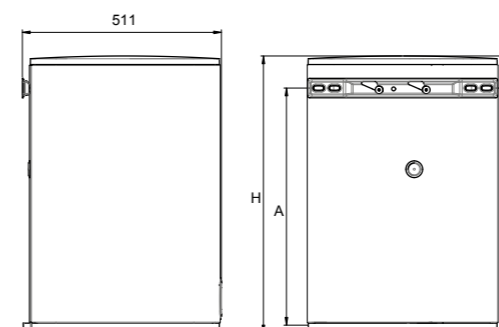

STEATITE CUBE WI-FI 75, 100

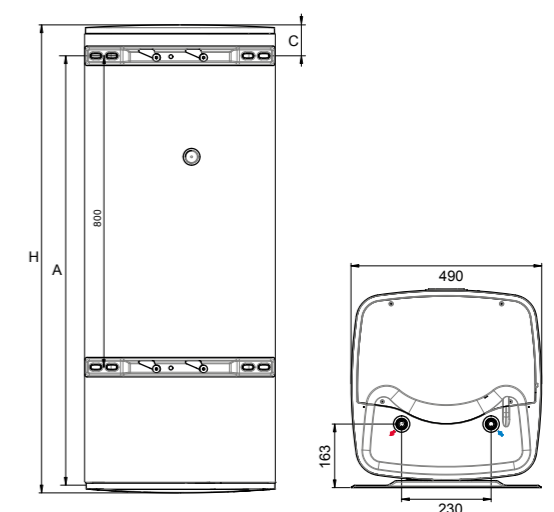

STEATITE CUBE WI-FI 150

Vertigo Steatite Wi-Fi



Wi-Fi CONNECTIVITY (IP)

ELECTRIC WATER HEATER

Models 30 to 100
(Multi-position installation)



White Silver



Video:

- 1 **DIAMOND-QUALITY GLASS LINING** for extended life and increased reliability
- 2 High-density, 0% CFC polyurethane foam
- 3 **MAGNESIUM ANODE X2** for protection against corrosion
- 4 Inlet diffuser
- 5 Optimised stainless steel outlet pipes
- 6 **DIGITAL THERMOSTAT** for temperature control accuracy



Video:

Steatite TECHNOLOGY

Dry Steatite heating element

Adapted to aggressive, mineralised and desalinated water. Its protective enamel-coated steel sleeve facilitates maintenance, and there is never any need to drain the tank to replace it.

Technical specifications

Model	Maximum power output: exit tank (W)	Power output: entry tank (W)	Voltage (V)	Total heat-up time $\Delta T=50^{\circ}\text{C}$	Heat-up time: exit tank	Energy consumption (kWh/24 h at 65°C)	ErP energy class	Profile
30 ⁽¹⁾	1000	1000	220-240	1h27	0h44	0.28	A B	S
50 ⁽²⁾	2250	1000	220-240	1h46	0h33	0.69	A B	M
80 ⁽³⁾	2250	1000	220-240	2h52	0h53	1.01	A B	M
100 ⁽⁴⁾	2250	1000	220-240	3h32	1h05	1.11	A B	M

Installation dimensions (mm)

Model	Dimensions (mm)				Net weight (kg)
	H	A	B	C	
30 ⁽¹⁾	593	452	280	141	19.5
50 ⁽²⁾	766	609	500	157	24.5
80 ⁽³⁾	1090	973	700	117	32.5
100 ⁽⁴⁾	1301	1184	800	117	37.5

(1) ErP capacity is 25 L (2) ErP capacity is 40 L (3) ErP capacity is 65 L (4) ErP capacity is 80 L

CE ENEC IP 24

Comfort

- Fast heating thanks to double-tank structure
- Easy programming with quick mode selection
- Boost mode generates maximum heating for extra water needs
- Connectivity and remote control via the Cozytouch application

Durability

- Double-tank Steatite technology: ceramic dry heating element protected by a sleeve for limited scaling and easy maintenance
- Double magnesium anode to bolster tank protection
- Diamond-quality glass lining
- Pressure relief valve
- Dielectric union
- Specific lip gasket to avoid corrosion around the flange

Installation

- Easy installation with wall-mounting plates and drilling template
- Multi-position installation – vertical or horizontal position
- Space-saving with only 29cm depth

Safe operation:

- IP 24 – full compliance with European standards for electrical safety and user protection

Energy savings


- Eco+ self-learning mode to supply the right amount of hot water when needed
- Monitor water and electricity use with the Cozytouch application
- Absence mode: generates energy savings when away from home
- Accurate electronic thermostat for fully accurate temperature controls

User-friendly

- Ergonomic digital interface with heating indicator, operating modes and smart functions



- 1 **Wi-Fi connectivity**
- 2 **Waterdrop LED indicator:** amount of hot water ready to use
- 3 **Absence mode:** anti-frost position (7°C)
- 4 **Manual mode:** required hot water amount selection
- 5 **Eco+ mode:** automatic operation based on consumers' daily habits
- 6 **QR code** for easy pairing with Cozytouch

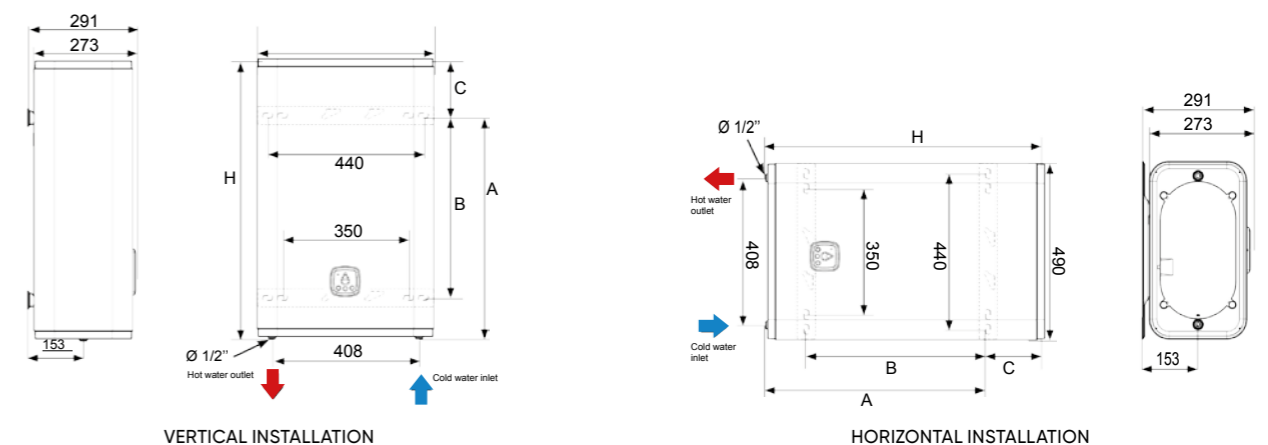



ELECTRIC WATER HEATER

Models 50 to 100
(Vertical wall-mounted)



Energy savings

- Eco+ self-learning mode to supply the right amount of hot water when needed
- Absence mode: generates energy savings away from home
- Electronic thermostat for fully accurate temperature controls
- High-efficiency water inlet
- CFC-free high-density polyurethane insulation



User-friendly

- Ergonomic digital interface with heating indicator, operating modes and smart functions



- 1** Waterdrop LED Indicator: amount of hot water ready to use
- 2** Absence mode: anti-frost position (7 °C)
- 3** Manual mode: required hot water amount selection
- 4** Eco+ mode: automatic operation based on consumers' daily habits



Comfort

- Boost function generates maximum heating for extra water needs
- Easy programming with quick mode selection



Durability

- Extended tank life thanks to O'Pro exclusive anti-corrosive protection
- Magnesium anode to bolster tank protection
- Diamond-quality glass lining
- Pressure relief valve
- Dielectric union
- Specific lip gasket to avoid corrosion around the flange





Installation

- Wall-mounted plates and drilling template available on packaging
- Easy grip thanks to a brand new top and bottom cover design

Safe operation:

- IP 24 - full compliance with European standards for electrical safety and user protection

- 1** DIAMOND-QUALITY GLASS LINING for extended life and increased reliability
- 2** Optimised stainless steel outlet pipe
- 3** High-density, 0% CFC polyurethane foam
- 4** MAGNESIUM ANODE for protection against corrosion
- 5** Copper heating element
- 6** Optimised inlet diffuser
- 7** ELECTRONIC REGULATION for temperature control accuracy

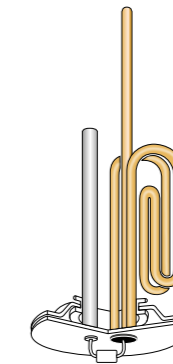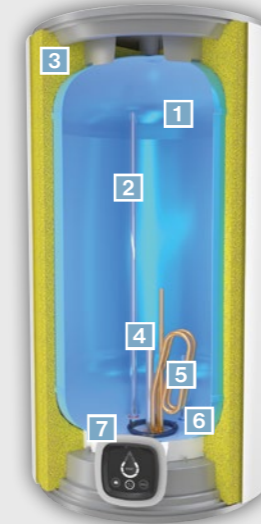

O'Pro
TECHNOLOGY

Exclusive anti-corrosive system

O'Pro technology uses an ohmic resistor to balance out the electric potential of both the tank and the heating element. This prolongs the life of the magnesium anode as well as bolstering protection against corrosion.

Video:




Technical specifications

Model	Output (W)	Voltage (V)	Heat-up time at 60°C (Δt=50°C)	ErP energy class	Profile
50	1500	220/240	1h56	A B	M
80	1500	220/240	2h54	A B	M
100	1500	220/240	3h52	A B	M

Installation dimensions (mm)

Model	Dimensions (mm)							Flange opening (Ø) mm	Net weight (kg)
	A	B	C	D	E	F	G		
50	603	445	463	240	210	165.5	1/2"	78	17.5
80	808	445	463	240	197	165.5	1/2"	78	23
100	965	445	463	240	211	165.5	1/2"	78	25

CE IP 24

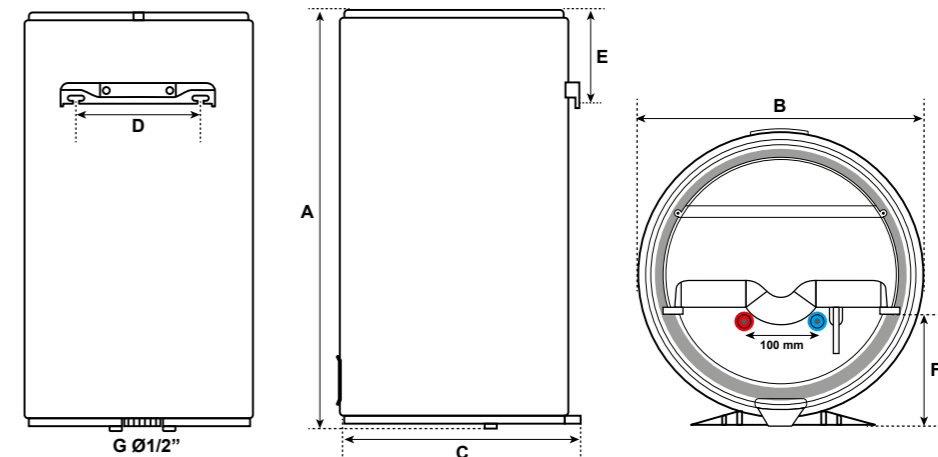



ELECTRIC WATER HEATER

Models 50 to 100
(Vertical wall-mounted)



Energy savings

- Eco+ self-learning mode to supply the right amount of hot water when needed
- Absence mode: generates energy savings when away from home
- Electronic thermostat for fully accurate temperature controls
- High-efficiency water inlet
- CFC-free high-density polyurethane insulation



User-friendly

- Ergonomic digital interface with heating indicator, operating modes



- 1 Waterdrop LED indicator: amount of hot water ready to use
- 2 Absence mode: anti-frost position (7 °C)
- 3 Manual mode: required hot water amount selection
- 4 Eco+ mode: automatic operation based on consumers' daily habits



Comfort

- Boost function generates maximum heating for extra water needs
- Easy programming with quick mode selection



Durability

- Steatite technology: ceramic dry heating element protected by a sleeve for limited scaling and easy maintenance
- Magnesium anode to bolster tank protection
- Diamond-quality glass lining
- Pressure relief valve
- Dielectric union
- Specific lip gasket to avoid corrosion around the flange



Installation

- Wall-mounted plates and drilling template available on the packaging
- Easy grip thanks to a brand new top and bottom cover design

Safe operation:

- IP 24 - full compliance with European standards for electrical safety and user protection

- 1 **DIAMOND-QUALITY GLASS LINING** for extended life and increased reliability
- 2 Optimised stainless steel outlet pipe
- 3 High-density, 0% CFC polyurethane foam
- 4 **MAGNESIUM ANODE** for protection against corrosion
- 5 Optimised inlet diffuser
- 6 **ELECTRONIC REGULATION** for temperature control accuracy




Video:



Steatite
TECHNOLOGY

Dry Steatite heating element



Adapted to aggressive, mineralised and desalinated water. Its protective enamel-coated steel sleeve facilitates maintenance, and there is never any need to drain the tank to replace it.


Technical specifications

Model	Output (W)	Voltage (V)	Heat-up time at 60°C (Δt=50°C)	ErP energy class	Profile
50	1800	220/240	1h37	A F B	M
80	1800	220/240	2h25	A F B	M
100	1800	220/240	3h14	A F B	M

Installation dimensions (mm)

Model	Dimensions (mm)							Flange opening (Ø) mm	Net weight (kg)
	A	B	C	D	E	F	G		
50	605	445	463	240	210	165.5	1/2"	78	17.5
80	808	445	463	240	197	165.5	1/2"	78	23
100	965	445	463	240	211	165.5	1/2"	78	25

CE ENEC IP 24

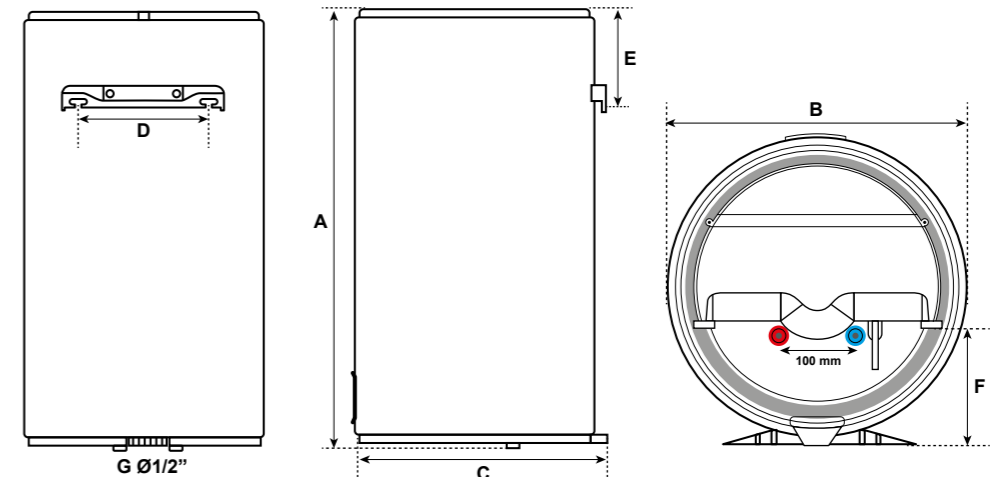



O'Pro and Steatite Central Domestic

Large capacity water heaters with improved design for better integration and easy installation



A WIDE SELECTION OF MODELS FOR ALL SPACE TYPES

- + Easy grip thanks to a new top and bottom cover design
- + Next-generation fully removable cover attached with screws

Floor-standing model



Thicker top and bottom handles
Easier to operate



Next-generation cover attached with screws
Easier to open and close

- Groove to guide cover placement
- Guide for placing attachment screws



70° angle cold water/cover connection
Water heater installation in a more accessible corner



1. Unscrew the 3 screws




2. Pull up the cover

Wall-mounted model




Thicker top and bottom handles
Easier to operate




Next-generation cover attached with screws
Easier to open and close


- Groove to guide cover placement
- Guide for placing attachment screws




A more readable, light-up display on the cover



1. Unscrew both screws



2. Open the cover to 45°



3. Pull up the cover



ELECTRIC WATER HEATER

Models 200 to 300
(Floor-standing)

Models 150 to 200
(Vertical and horizontal wall-mounted)



Comfort

- Large tank capacity for more hot water



Durability

- Extended tank life thanks to O'Pro exclusive anti-corrosive system, which permanently combats rust
- Magnesium anode to bolster tank protection
- Diamond-quality glass lining
- Pressure relief valve
- Dielectric union
- Specific lip gasket to prevent corrosion around the flange



Installation

- Range of sizes to meet all installation requirements
- Vertical and horizontal wall-mounted and floor-standing models available
- Easy installation using deeper handles on both sides

Safe operation:

- IP 24 - full compliance with European standards for electrical safety and user protection



Energy savings

- High-efficiency water inlet
- CFC-free high-density insulation to increase energy savings





User-friendly

- Heating light indicator (Wall-mounted model)



- 1 DIAMOND-QUALITY GLASS LINING** for extended life and increased reliability
- Optimised stainless steel
- 3 MAGNESIUM ANODE** for protection against corrosion
- Sheathed immersion heating element
- Inlet diffuser
- High-density, 0% CFC polyurethane foam

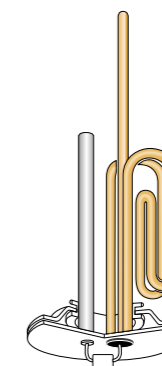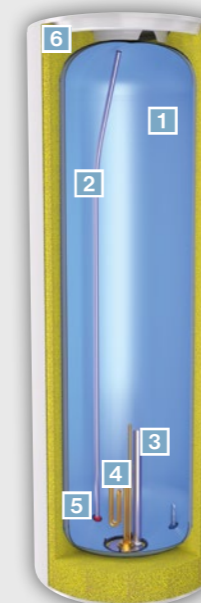

Exclusive anti-corrosive system

O'Pro technology uses an ohmic resistor to balance out the electric potential of both the tank and the heating element. This prolongs the life of the magnesium anode as well as bolstering protection against corrosion.

Video:




Technical specifications


Model	Output (W)	Voltage (V)	Energy consumption (kWh/24 h at 65°C)	Heat-up time at 60°C (Δt=50°C)	Hot water capacity at 40°C (L)	ErP energy Class	Profile
O'Pro Central Domestic Vertical wall-mounted							
150	2200	220-240	1.65	4h14	246	A++ C	M
200	2200	220-240	1.94	5h44	374	A++ C	L
O'Pro Central Domestic Horizontal wall-mounted							
150	2200	220-240	1.51	4h07	245	A++ C	L
200	2200	220-240	1.81	5h33	301	A++ C	L
O'Pro Central Domestic Floor-standing							
200	3000	220-240	1.82	5h06	334	A++ C	L
300	3000	220-240	2.41	5h53	468	A++ C	L

Installation dimensions (mm)



Model	Dimensions (mm)					Net weight (kg)
	Ø	A	B	C	H	
O'Pro Central Domestic Vertical wall-mounted						
150	513	1050	800	530	1155	35
200	513	1050	800	530	1475	43
O'Pro Central Domestic Horizontal wall-mounted						
150	520	-	800	610	1150	37
200	520	-	1050	610	1470	45
O'Pro Central Domestic Floor-standing						
200	575	-	-	590	1270	47
300	575	-	-	590	1765	60

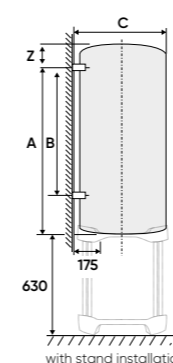

VERTICAL WALL-MOUNTED



HORIZONTAL WALL-MOUNTED

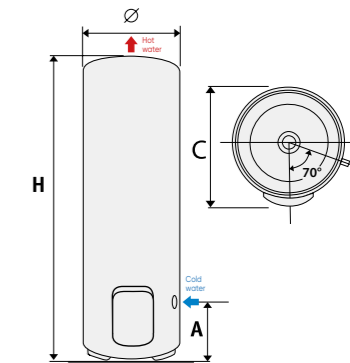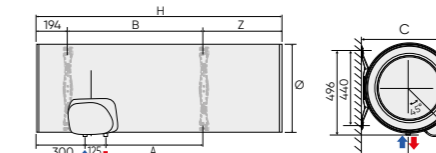

FLOOR-STANDING