

## Product Technical Sheet

# T90SR DuElec™

## Pumped Electric Shower

### Product Codes

|                      |     |       |          |
|----------------------|-----|-------|----------|
| T90SR DuElec™ Pumped | 9kW | Black | XE90DU93 |
|----------------------|-----|-------|----------|

### Installation

- Left-hand side water and cable entry points

### Commissioning

- Inlet connection: 15mm compression
- Outlet connection: 1/2" BSP male thread

### End User

- So quiet that when the water is running you won't hear the pump
- Ideal solution for stud walls which are more susceptible to vibration & noise transmission
- Choice of showering experience - Divert water between a 5 spray pattern shower head and luxurious fixed rainfall shower head, or even use both together
- Integrated pump boosts the water pressure of low- pressure gravity fed supplies
- Easy prime pump allows water flow without the need to operate the pump
- 2 year parts and labour guarantee
- Efficient A energy rating



## Product Technical Sheet

# T90SR DuElec™

## Pumped Electric Shower

### Shower


|                          |  |
|--------------------------|--|
| Temperature Control      | Pumped electric stabilised                 |
| Power Ratings            | 9kW (230v)                                 |
| Inlet Connection         | 15mm compression                           |
| Water Entry Points       | Top, bottom, back (left hand side of unit) |
| Cable Entry Points       | Top, bottom, back (left hand side of unit) |
| Outlet Connection        | 1/2" BSP                                   |
| Plumbing System          | Cold water cistern only                    |
| Minimum Head Pressure    | 75mm                                       |
| Maximum Head Pressure    | 10m  |
| Surface Mounted Only     |  |
| Approvals, Complies with | BEAB, CE, BSI Kitemark                     |
| Guarantee                | 2 years                                    |

#### Diagram Key:

-  Water Entry Points
-  Cable Entry Points


#### Dimensions:

- H: 266mm
- W: 322mm
- D: 95mm

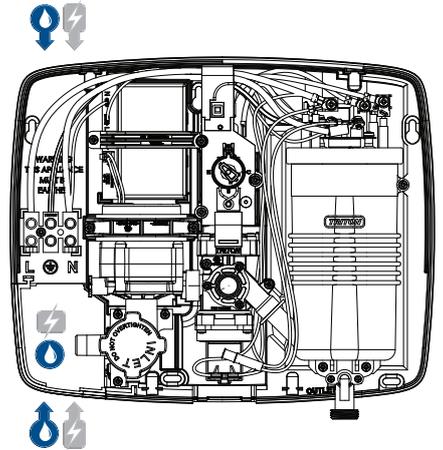

### Riser Rail Kit

|          |  |
|----------|--|
| Length   | 1007mm   |
| Diameter | 20.5mm   |
| Material | Double Interlocked Stainless Steel                         |
| Finish   | Black Matte  |
| Hose     | 1.25m Anti-twist Chrome (main hose)<br>1m (connector hose) |

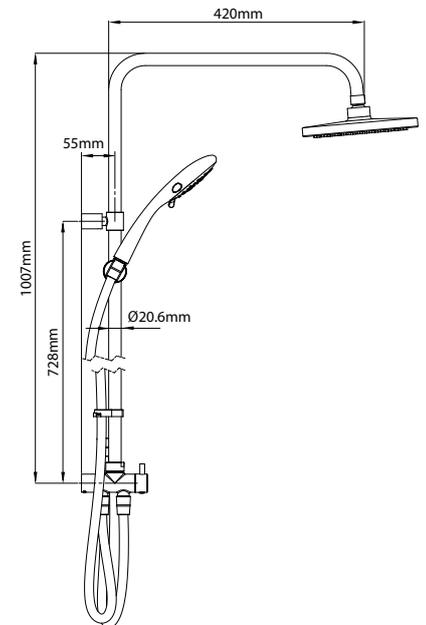

### IMPORTANT MAINTENANCE NOTICE

Replacing with specified Triton accessories will aid optimum performance and keep the unit within the allocated guarantee period



1.25m Anti-Twist Shower Hose – Matte Black  
TSHG150BLK



8000 Series Shower Head – Matte Black  
TSHE8RCBLK

Contact our specification team  
Call: 01 628 6845 | Email: [sales@earthridge.ie](mailto:sales@earthridge.ie) | Web: [www.tritonshowers.ie](http://www.tritonshowers.ie)